


DATE	REV. #	ISSUE
04.05.04	1	As-Built
06.24.04	2	DD / BD Set
10.15.04	3	BD Set 2
03.30.05	4	Revised As Per DOB / ADG

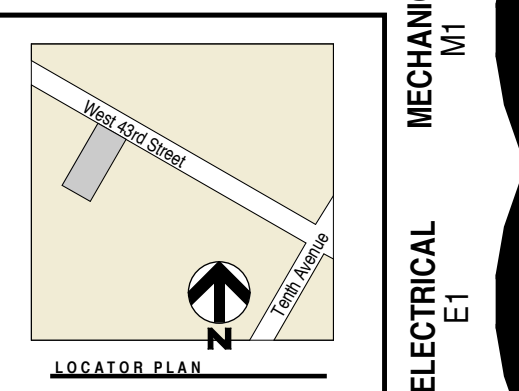

DATE	REV. #	ISSUE
04.05.04	1	As-Built
06.24.04	2	DD / BD Set
10.15.04	3	BD Set 2
03.30.05	4	Revised As Per DOB / ADG

JOB #	SCALE	DATE	DRAWN BY
19103	as noted	12.09.03	RCGS, JN

PROPOSED LONGITUDINAL SECTION
COVERSITE ARCHITECTURE AT
A2.50

Wall Types

- 1 Laminate Wall**
5/8" GWB type X laminated to existing Structure/Masonry Wall. Spackle (3) Coats, Pt. (2 coats min.) and/or finish as indicated. Use USG approved glue and/or USG approved fasteners.
- 2 Water Resistant Wall**
5/8" Wonderboard [or approved equal] applied or laminated to existing studs and/or masonry wall. Spackle (3) Coats, Pt. (2 coats min.) and/or finish as indicated. Use USG approved glue and/or USG approved fasteners.
- 3 Furred Wall**
One layer 5/8" GWB wallboard type X applied to one side of 7/8" metal Furring Channel (20 Gauge) 16" o.c. with 1" type S drywall screws 8" o.c. to vertical edges, and 12" o.c. to intermediate studs. Spackle (3) Coats, Pt. (2 coats min.) and/or finish as indicated.
SIM: Use 5/8" Metal Studs. Use USG approved glue and/or USG approved fasteners.
- 2x3 Partition**
One layer 5/8" GWB type X applied to each side of 2 5/8" x 1 5/8" 20 Gauge studs 16" o.c. w/ 1" type S drywall screws 8" o.c. to vertical edges, and 12" o.c. to intermediate studs. Spackle (3) Coats, Pt. (2 coats min.) and/or finish as indicated. Use USG approved glue and/or USG approved fasteners.
- 2x4 Partition**
One layer 5/8" GWB wallboard type X applied to each side of 5 5/8" metal studs (20 Gauge) 16" o.c. with 1" type S drywall screws 8" o.c. to vertical edges, and 12" o.c. to intermediate studs. Spackle (3) Coats, Pt. (2 coats min.) and/or finish as indicated. Use USG approved glue and/or USG approved fasteners.
SIM: 2Hr. Partition: Provide 2 layers of 5/8" GWB Typ. for each side with fiber batting per client's stipulation.
- 2x6 Partition**
One layer 5/8" GWB wallboard type X applied to each side of 5 5/8" metal studs (20 Gauge) 16" o.c. with 1" type S drywall screws 8" o.c. to vertical edges, and 12" o.c. to intermediate studs. Spackle (3) Coats, Pt. (2 coats min.) and/or finish as indicated. Use USG approved glue and/or USG approved fasteners.
- 7 Pocket Door Assembly**
One layer 5/8" GWB wallboard type X applied to each side of 5 5/8" metal studs (20 Gauge) 16" o.c. with 1" type S drywall screws 8" o.c. to vertical edges, and 12" o.c. to intermediate studs. Where necessary turn studs on edge. Spackle (3) Coats, Pt. (2 coats min.) and/or finish as indicated. Use USG approved glue and/or USG approved fasteners.
- 8 Chase Wall**
Interior 2x4 pipe chase, 2x4 studs on edge as req'd. Apply 5/8" GWB type X to 3 5/8" x 1 5/8" metal studs on edge. Enclose pipes as req'd. Follow MFG recommendations for drywall screws. Use USG approved glue and/or USG approved fasteners.
- 9 Cabinet Partition**
3/4" AB Grade Interior Plywood. Paint Grade Sanded & Smooth. (Modified as Per Other Notes.) Use USG approved glue and/or USG approved fasteners.
- 10 Exterior Stud Wall**
- 11 Storefront**
See Details on Wall Type Page
- 12 Block Wall**
4" Concrete Block Wall
Sim: One layer 5/8" GWB wallboard type X applied to one side
- 13 Insulated Wall (By Others)**
4" Thick Rigid Insulated Wall
Sim: One layer 5/8" GWB wallboard type X applied to one side
- 14 FRP on Furring and / or Laminate to Existing Partitions**
Note: For all Wall types see Finish Schedule for interior finish.

Legend

- Existing Walls
- Demo/Verify activity
- New Construction
- Built-in Casework
- Plumbing
- Electrical
- Plan Detail
- Interior Elevation
- Building Section
- Door Number (New Door)
- Window Number
- Indicates Room Name
- Room Number
- Wall Type
- Emergency Exit Lighting
- Exit Sign



Proposed Section

- General Notes:**
- All floors, public halls and apartments to be fully sprinkled.
 - All bathrooms and kitchens to meet ADA and Local Law 57/58 requirements.
 - Blocking for grab bars, typical all bathrooms.
 - All Fire Corridor Doors to be 3'-0" Wide and 1 1/2 Hour FPSC. Typ. at all floors unless noted otherwise.
 - All Chases to have 2 Hour Rated Partitions. Typ at all floors unless noted otherwise.
 - All Public Hallways to have 1 Hour Partitions.